

# 12NDL76

## LF Drivers - 12.0 Inches

800 W continuous program power capacity

76 mm (3 in) aluminium voice coil

50 - 2000 Hz response

100 dB sensitivity

Neodymium magnet allows a very light yet powerful motor assembly

Ventilated voice coil gap for reduced power compression



## Specifications

Nominal diameter	320 mm (12.0 in)
Nominal impedance	8 $\Omega$
Minimum impedance	6.2 $\Omega$
Nominal power handling <sup>1</sup>	400 W
Continuous power handling <sup>2</sup>	800 W
Sensitivity (1W/1m) <sup>3</sup>	100.0 dB
Frequency range	50 - 2000 Hz
Voice coil diameter	76 mm (3.0 in)
Winding material	Aluminium
Former material	Glass Fibre
Winding depth	19 mm (0.75 in)
Magnetic gap depth	10 mm (0.4 in)
Flux density	1.25 T

## Design

Surround shape	Double Roll
Cone shape	Exponential
Magnet material	Neodymium Inside Slug

## Design

Spider	Single
Pole design	Straight Pole
Woofer cone treatment	WP Waterproof Front Side
Recommended enclosure	42.0 dm <sup>3</sup> (1.48 ft <sup>3</sup> )
Recommended tuning	65 Hz

## Parameters<sup>4</sup>

Fs	50 Hz
Re	5.3 $\Omega$
Qes	0.21
Qms	4.2
Qts	0.2
Vas	73.0 dm <sup>3</sup> (2.5 ft <sup>3</sup> )
Sd	522.0 cm <sup>2</sup> (80.9 in <sup>2</sup> )
$\eta_0$	4.3 %
Xmax	6.5 mm
Xvar	6.5 mm
Mms	53 g
Bl	20.1 Txm

## Parameters

Le	1.0 mH
EBP	238 Hz

## Mounting And Shipping Info

Overall diameter	315 mm (12.4 in)
Bolt circle diameter	298 mm (11.7 in)
Baffle cutout diameter	283.0 mm (11.1 in)
Depth	141 mm (5.5 in)
Flange and gasket thickness	14 mm (0.55 in)
Air volume occupied by driver	2.5 dm <sup>3</sup> (0.08 ft <sup>3</sup> )
Net weight	3.9 kg (8.6 lb)
Shipping units	1
Shipping weight	4.5 kg (9.9 lb)
Shipping box	340x340x170 mm (13.4x13.4x6.7 in)


## Service Kit

RCK12NDL768

1. 2 hours test made with continuous pink noise signal (6 dB crest factor) within the range Fs-10Fs. Power calculated on rated minimum impedance. Loudspeaker in free air.
2. Power on Continuous Program is defined as 3 dB greater than the Nominal rating.

3. Applied RMS Voltage is set to 2.83 V for 8 ohms Nominal Impedance.
4. Thiele-Small parameters are measured after a high level 20 Hz sine wave preconditioning test.

Frequency Response (2,83 Vrms/1 m)

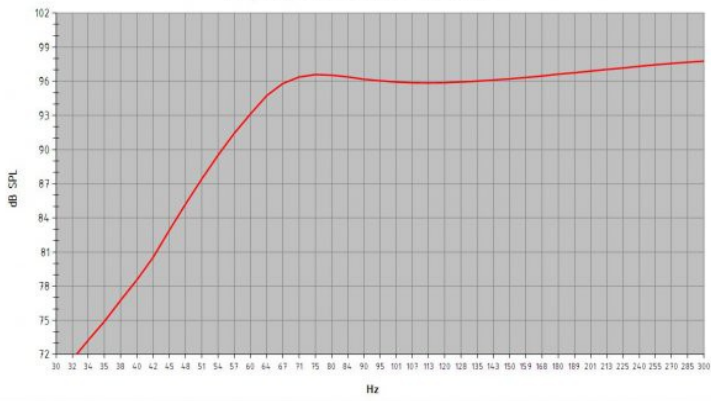

Model: **12 NDL 76**  
Enclosure Type: **Bass Reflex**

Internal Net Volume (Liters): **42**  
Tuning Frequency (Hz): **65** Port Area (cm<sup>2</sup>): **138.7**  
Frequency (-3 dB) (Hz): **68.0** Port Length (cm): **11.9**

Excursion Limited Maximum SPL at 1 meter (dB): **121.1** equal to **214.4** Watts (Bass Band Power Rating)  
Thermal Limited Maximum SPL at 1 meter (dB): **123.8** equal to **400.0** Watts (Mid Band Power Rating)