

18TBX100

LF Drivers - 18.0 Inches

2400 W continuous program power capacity

100 mm (4 in) copper voice coil

35 - 1000 Hz response

97 dB sensitivity

Aluminium demodulating ring allows a very low distortion figure

Double silicone spider with optimized compliance

Ventilated voice coil gap for reduced power compression



Specifications

Nominal diameter	460 mm (18.0 in)
Nominal impedance	8 Ω
Minimum impedance	6.2 Ω
Nominal power handling ¹	1200 W
Continuous power handling ²	2400 W
Sensitivity (1W/1m) ³	97.0 dB
Frequency range	35 - 1000 Hz
Voice coil diameter	100 mm (4.0 in)
Winding material	Copper
Former material	Glass Fibre
Winding depth	25 mm (1.0 in)
Magnetic gap depth	12 mm (0.5 in)
Flux density	1.1 T

Design

Surround shape	Triple Roll
Cone shape	Radial
Magnet material	Ferrite

Design

Spider	Double Silicone
Pole design	T-Pole
Woofer cone treatment	TWP Waterproof Both Sides
Recommended enclosure	200.0 dm ³ (7.06 ft ³)
Recommended tuning	34 Hz

Parameters⁴

Fs	34 Hz
Re	5.1 Ω
Qes	0.37
Qms	7.2
Qts	0.35
Vas	212.0 dm ³ (7.5 ft ³)
Sd	1210.0 cm ² (187.6 in ²)
η _o	2.2 %
X _{max}	9.0 mm
X _{var}	11.0 mm
M _{ms}	209 g
Bl	25.5 Txm

Parameters

Le	1.6 mH
EBP	91 Hz

Mounting And Shipping Info

Overall diameter	460 mm (18.0 in)
Bolt circle diameter	440 mm (17.3 in)
Baffle cutout diameter	422.0 mm (16.6 in)
Depth	209 mm (8.2 in)
Flange and gasket thickness	16 mm (0.62 in)
Air volume occupied by driver	10.5 dm ³ (0.37 ft ³)
Net weight	13.0 kg (28.6 lb)
Shipping units	1
Shipping weight	14.4 kg (31.7 lb)
Shipping box	500x500x250 mm (19.7x19.7x9.8 in)


Service Kit

RCK18TBX1008

1. 2 hours test made with continuous pink noise signal (6 dB crest factor) within the range Fs-10Fs. Power calculated on rated minimum impedance. Loudspeaker in free air.
2. Power on Continuous Program is defined as 3 dB greater than the Nominal rating.

3. Applied RMS Voltage is set to 2.83 V for 8 ohms Nominal Impedance.
4. Thiele-Small parameters are measured after a high level 20 Hz sine wave preconditioning test.

Frequency Response (2,83 Vrms/1 m)

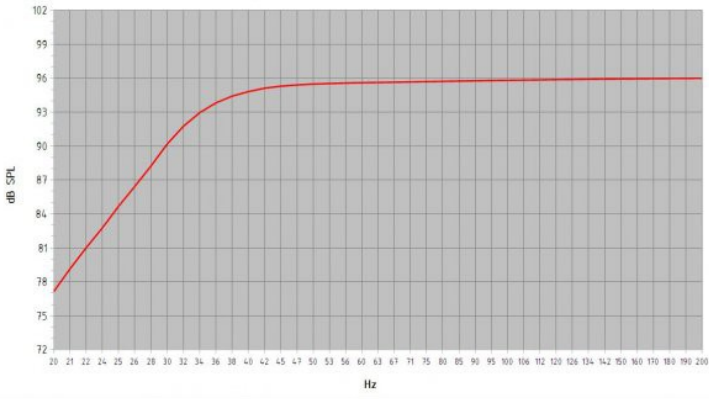

Model: **18 TBX 100**
 Enclosure Type: **Bass Reflex**

Internal Net Volume (Liters): **200**
 Tuning Frequency (Hz): **34** Port Area (cm²): **339.6**
 Frequency (-3 dB) (Hz): **34.3** Port Length (cm): **26.0**

Excursion Limited Maximum SPL at 1 meter (dB): **120.3** equal to **340.4** Watts (Bass Band Power Rating)
 Thermal Limited Maximum SPL at 1 meter (dB): **125.8** equal to **1200.0** Watts (Mid Band Power Rating)