


Custom Vented Box Design

By karsten, cad



Box Properties

--Description--

Name: 1x15 sub comparison

Type: Vented Box

Shape: Prism, square

Finish: black warnex

Veneer: 15mm birch ply

--Box Parameters--

Vb = 108, liters

V(total) = 114,9 liters

Fb = 47, Hz

F3 = 47,67 Hz

Fill = minimal

--Vents--

No. of Vents = 1


Vent shape = rectangle

Vent ends = one flush

Hv = 55, mm

Wv = 425, mm

Lv = 202,5 mm

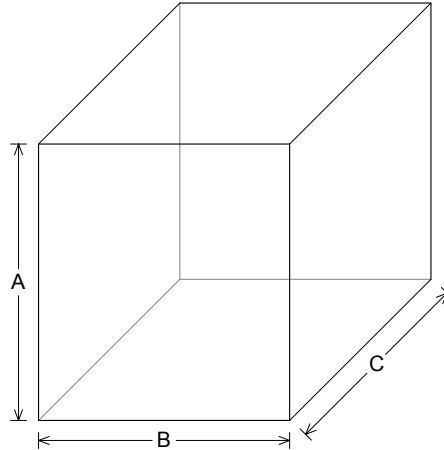

--External Dimensions--

A = 550, mm

B = 500, mm

C = 530, mm

--Internal Dimensions--

A = 520, mm

B = 470, mm

C = 470, mm

--Wall Thickness--

Front = 45, mm

Side = 15, mm

Driver Properties

--Description--

Name: 15 G450/N

Type: Standard one-way driver

Company: Acustica Beyma, S. A.

Piston: Paper cone

Suspension: Plasticised cloth surround

Dust Cap: Paper

Frame: Die cast aluminium

Voice Coil: Flat copper

Terminals: Push

Magnet: Weight - 10.8 kg

--Configuration--

No. of Drivers = 1

--Driver Parameters--

Fs = 45, Hz

Qms = 10,5

Vas = 115, liters

Xmax = 6,5 mm

Sd = 880, sq.cm


Qes = 0,33

Re = 5,7 ohms

Le = 1,7 mH

Z = 8, ohms

Pe = 600, watts

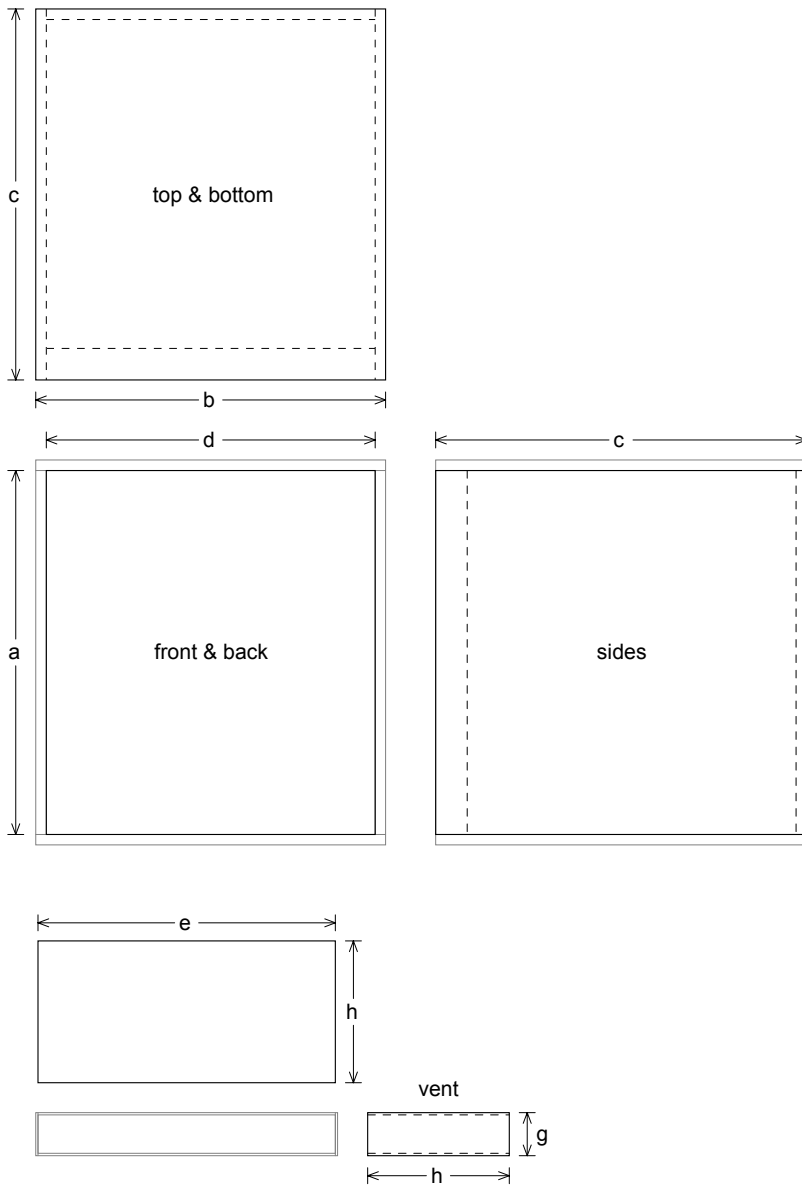

Box Parts

Box Shape: Square Prism

1 Top, 1 Bottom: depth (c) = 530, mm
width (b) = 500,, thickness = 15, mm

1 Front: height (a) = 520, mm

width (d) = 470,, thickness = 45, mm

1 Back: height (a) = 520, mm

width (d) = 470,, thickness = 15, mm

2 Sides: height (a) = 520, mm

depth (c) = 530,, thickness = 15, mm

--Driver Mounting--

Mounting: Flush

--Vent Parts--

1 Top, 1 Bottom:

width (e) = 425,, length (h) = 202,5 mm

thickness = 3,175 mm

2 Sides:

height (g) = 61,35, length (h) = 202,5 mm

thickness = 3,175 mm

