


Custom Vented Box Design

By karsten, cad



Box Properties

--Description--

Name: 1x15 sub comparison

Type: Vented Box

Shape: Prism, square

Finish: black warnex

Veneer: 15mm birch ply

--Box Parameters--

Vb = 102,7 liters

V(total) = 114,9 liters

Fb = 38, Hz

F3 = 38,92 Hz

Fill = minimal

--Vents--

No. of Vents = 1


Vent shape = rectangle

Vent ends = one flush

Hv = 50, mm

Wv = 425, mm

Lv = 351,4 mm

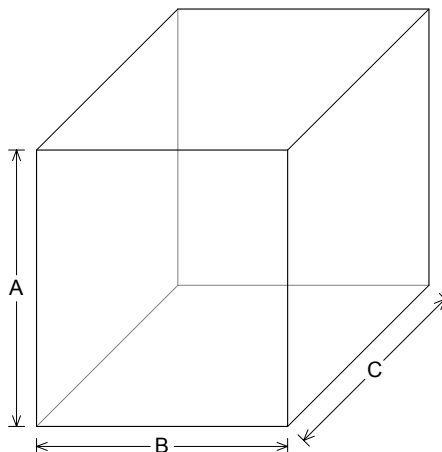

--External Dimensions--

A = 550, mm

B = 500, mm

C = 530, mm

--Internal Dimensions--

A = 520, mm

B = 470, mm

C = 470, mm

--Wall Thickness--

Front = 45, mm

Side = 15, mm

Driver Properties

--Description--

Name: Stroker 15D

Type: Standard one-way driver

Company: Cerwin Vega Inc.

Comment: Stroker series

Piston: Rhinohide

Suspension: Dual concentric spider

Frame: Sand cast

Voice Coil: 3 in, Metal alloy coil bobbin

Terminals: Gold plated

Magnet: Thick gap plate & extended pole piece

--Configuration--

No. of Drivers = 1

Dual voice coils = separate

--Driver Parameters--

Fs = 43, Hz

Qms = 7,616

Vas = 64, liters

Xmax = 11,43 mm






Sd = 844, sq.cm

Qes = 0,293

Re = 3,2 ohms

Z = 4, ohms

Pe = 600, watts

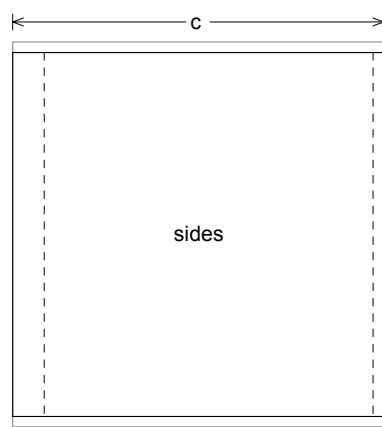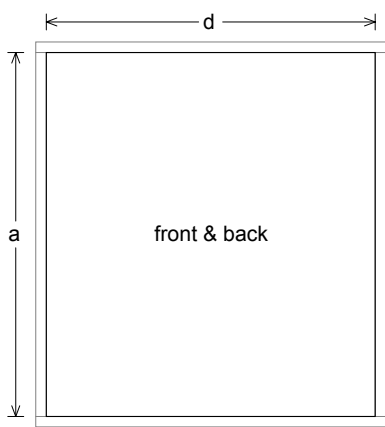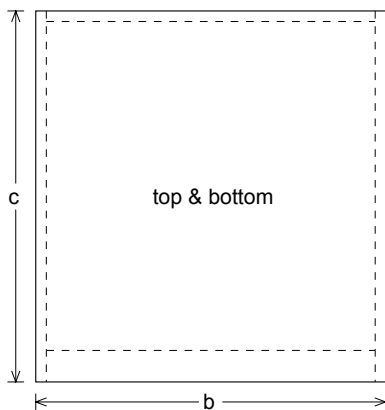

Box Parts

- Box Shape: Square Prism
 1 Top, 1 Bottom: depth (c) = 530, mm
 width (b) = 500,, thickness = 15, mm
 1 Front: height (a) = 520, mm
 width (d) = 470,, thickness = 45, mm
 1 Back: height (a) = 520, mm
 width (d) = 470,, thickness = 15, mm
 2 Sides: height (a) = 520, mm
 depth (c) = 530,, thickness = 15, mm

--Driver Mounting--
 Mounting: Flush

- Vent Parts--
 1 Top, 1 Bottom:
 width (e) = 425,, length (h) = 351,4 mm
 thickness = 3,175 mm
 2 Sides:
 height (g) = 56,35, length (h) = 351,4 mm
 thickness = 3,175 mm

