



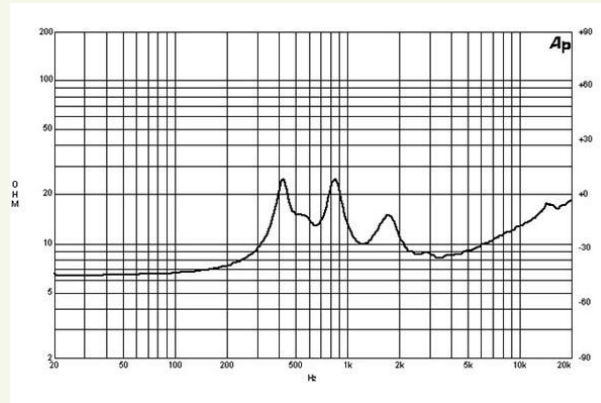

DE75PTN | HF Drivers

220 W continuous program power capacity
 2" horn throat diameter
 75 mm (3 in) aluminium voice coil
 Titanium diaphragm
 500 – 18000 Hz response
 107 dB sensitivity

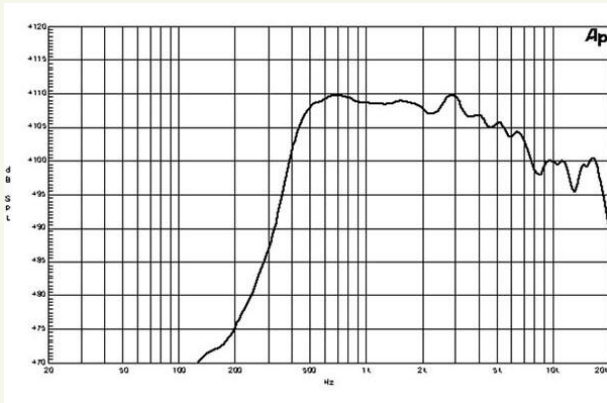

Specifications

| | |
|---------------------------|----------------|
| Throat Diameter | 50 mm (1.4 in) |
| Nominal Impedance | 8 ohm |
| Minimum Impedance | 8.3 ohm |
| Nominal Power Handling | 110 W |
| Continuous Power Handling | 220 W |
| Sensitivity (1W/1m) | 107 dB |
| Frequency Range | 0.5 -18 kHz |
| Recommended Crossover | 0.8 kHz |
| Voice Coil Diameter | 75 mm (3 in) |
| Winding Material | Aluminium |
| Inductance | 0.14 mH |
| Diaphragm Material | Titanium |
| Flux Density | 1.85 T |

Mounting and Shipping Info

| | |
|---|---------------------------------|
| Four M6 holes 90° on 102 mm (4 in) diameter | |
| Overall Diameter | 170 mm (6.7 in) |
| Depth | 64 mm (2.5 in) |
| Net Weight (1 unit) | 4.5 kg (9.9 lb) |
| Shipping Weight (2 units) | 9.6 kg (21.2 lb) |
| Shipping Box (2 units) | 210x210x190 mm (8.3x8.3x7.5 in) |

Horns
 HF Drivers
 Coaxials
 LF Nd Drivers
 LF Drivers

