



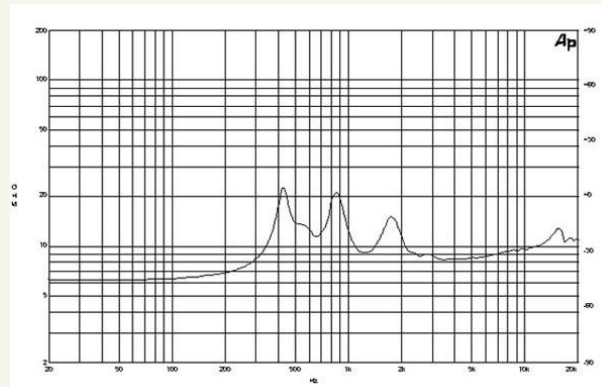

DE85TN | HF Drivers

220 W continuous program power capacity
 2" horn throat diameter
 75 mm (3 in) aluminium voice coil
 Titanium diaphragm
 500 – 18000 Hz response
 107 dB sensitivity
 Shorting copper cap for extended HF response

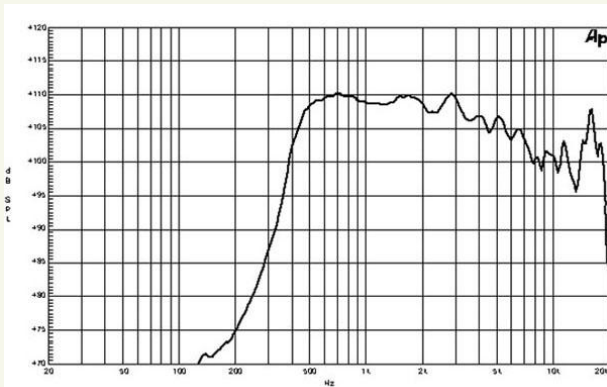

Specifications

Throat Diameter	50 mm (1.4 in)
Nominal Impedance	8 ohm
Minimum Impedance	8.2 ohm
Nominal Power Handling	110 W
Continuous Power Handling	220 W
Sensitivity (1W/1m)	107 dB
Frequency Range	0.5 -18 kHz
Recommended Crossover	1 kHz
Voice Coil Diameter	75 mm (3 in)
Winding Material	Aluminium
Inductance	0.14 mH
Diaphragm Material	Titanium
Flux Density	1.8 T

Mounting and Shipping Info

Four M6 holes 90° on 102 mm (4 in) diameter	
Overall Diameter	170 mm (6.7 in)
Depth	64 mm (2.5 in)
Net Weight (1 unit)	4.5 kg (9.9 lb)
Shipping Weight (2 units)	9.6 kg (21.2 lb)
Shipping Box (2 units)	210x210x190 mm (8.3x8.3x7.5 in)

Horns
 HF Drivers
 Coaxials
 LF Nd Drivers
 LF Drivers

