



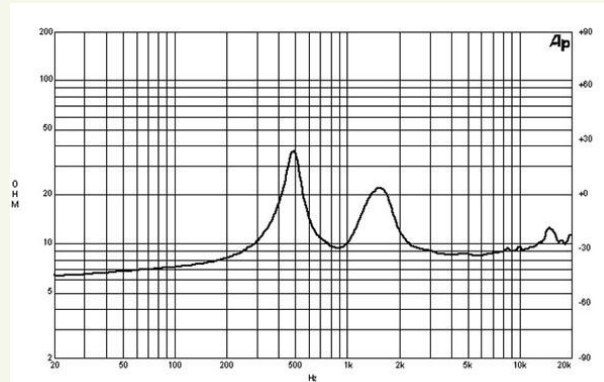

DE900TN | HF Drivers

220 W continuous program power capacity
1.4" horn throat diameter
75 mm (3 in) aluminium voice coil
Titanium diaphragm
500 – 18000 Hz response
108.5 dB sensitivity

Neodymium magnet assembly with shorting copper cap

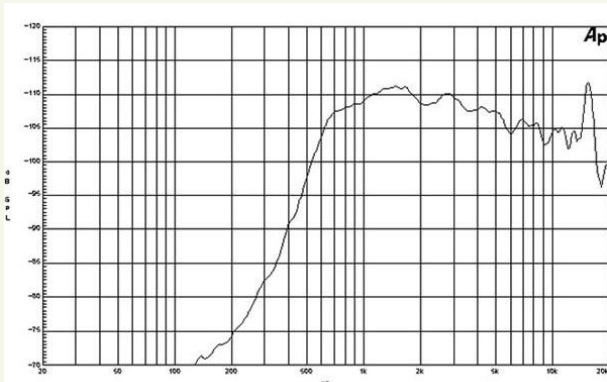

Specifications

Throat Diameter	36 mm (1.4 in)
Nominal Impedance	8 ohm
Minimum Impedance	7.8 ohm
Nominal Power Handling	110 W
Continuous Power Handling	220 W
Sensitivity (1W/1m)	108.5 dB
Frequency Range	0.5 -18 kHz
Recommended Crossover	1.2 kHz
Voice Coil Diameter	75 mm (3 in)
Winding Material	Aluminium
Inductance	0.14 mH
Diaphragm Material	Titanium
Flux Density	2.05 T

Mounting and Shipping Info

Four M6 holes 90° on 102 mm

(4 in) diameter

Overall Diameter 131 mm (5.2 in)

Depth 65 mm (2.6 in)

Net Weight (1 unit) 2.6 kg (5.7 lb)

Shipping Weight (4 units) 11 kg (24.2 lb)

Shipping Box (4 units) 300x160x180 mm

(11.8x6.3x7.1 in)

Horns
HF Drivers
Coaxials
LF Nd Drivers
LF Drivers

