

Box Properties

--Description--

Name: 1x18 sub comparison

Type: Vented Box

Shape: Prism, square

--Box Parameters--

Vb = 158,2 liters

V(total) = 174,3 liters

Fb = 42, Hz

F3 = 42,72 Hz

Fill = minimal

--Vents--

No. of Vents = 1


Vent shape = rectangle

Vent ends = one flush

Hv = 100, mm

Wv = 430, mm

Lv = 318,8 mm

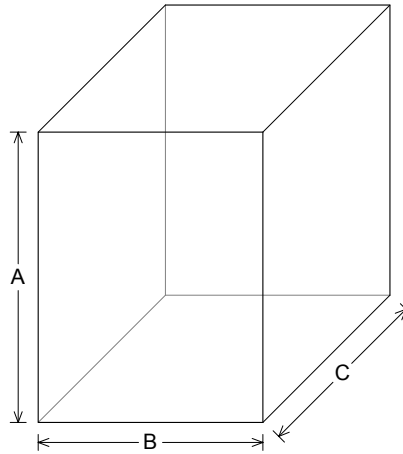

--External Dimensions--

A = 706, mm

B = 546, mm

C = 583, mm

--Internal Dimensions--

A = 670, mm

B = 510, mm

C = 510, mm

--Wall Thickness--

Front = 55, mm

Side = 18, mm

Driver Properties

--Description--

Name: 18 XB 600

Type: Standard one-way driver

Company: Oberton Co.

Piston: Kevlar paper cone.

Frame: Die cast aluminum.

Voice Coil: 100 mm copper. Kapton former.

Magnet: Barium ferrite magnet.

--Configuration--

No. of Drivers = 1

--Driver Parameters--

Fs = 33,3 Hz

Qms = 14,2

Vas = 236, liters

Xmax = 5,5 mm

Sd = 1090 sq.cm






Qes = 0,31

Re = 5,1 ohms

Le = 1,82 mH

Z = 8, ohms

Pe = 600, watts

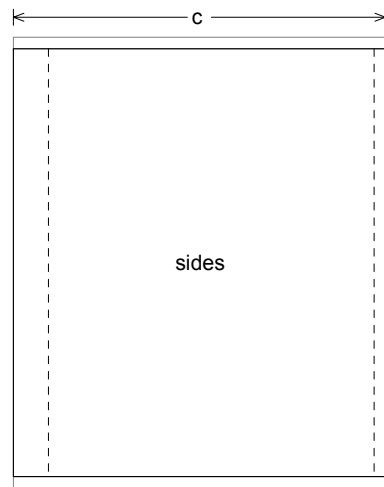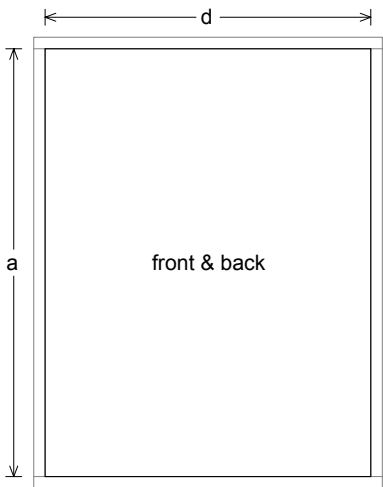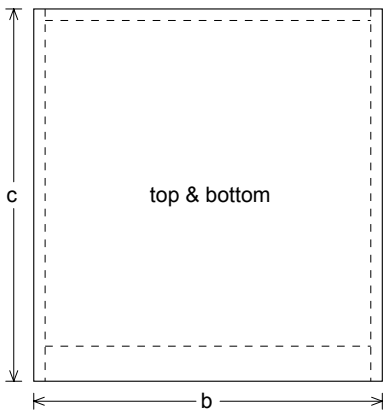

Box Parts

Box Shape: Square Prism

1 Top, 1 Bottom: depth (c) = 583, mm
width (b) = 546,, thickness = 18, mm

1 Front: height (a) = 670, mm

width (d) = 510,, thickness = 55, mm

1 Back: height (a) = 670, mm

width (d) = 510,, thickness = 18, mm

2 Sides: height (a) = 670, mm

depth (c) = 583,, thickness = 18, mm

--Driver Mounting--

Mounting: Flush

--Vent Parts--

1 Top, 1 Bottom:

width (e) = 430,, length (h) = 318,8 mm

thickness = 3,175 mm

2 Sides:

height (g) = 106,4, length (h) = 318,8 mm

thickness = 3,175 mm

