



Impedance	6 ohms	V.C. Diameter	20 mm
Fs	1579 Hz	V.C. Length	1.7 mm
Power RMS (iec)	40 W	V.C. Former	aluminum
Sensitivity (2.83V/1m)	92.0 dB	V.C. Layers	2
Re	4.88 ohms	Diaphragm	treated cloth
Le	0.02 mH	Faceplate	polymer
Xmax	± 0.15 mm	Net Weight	50 gr

Response Curve

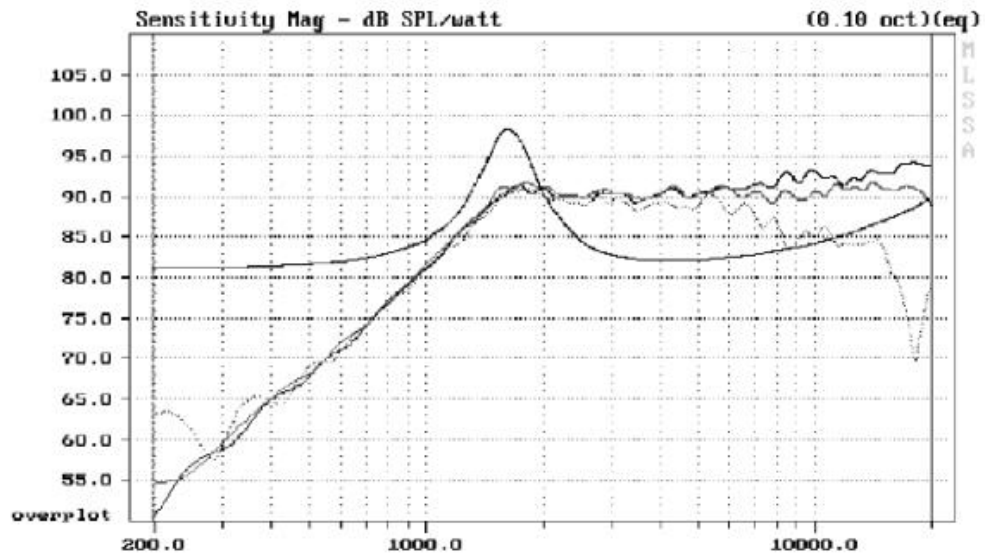

Spectral Decay Plot

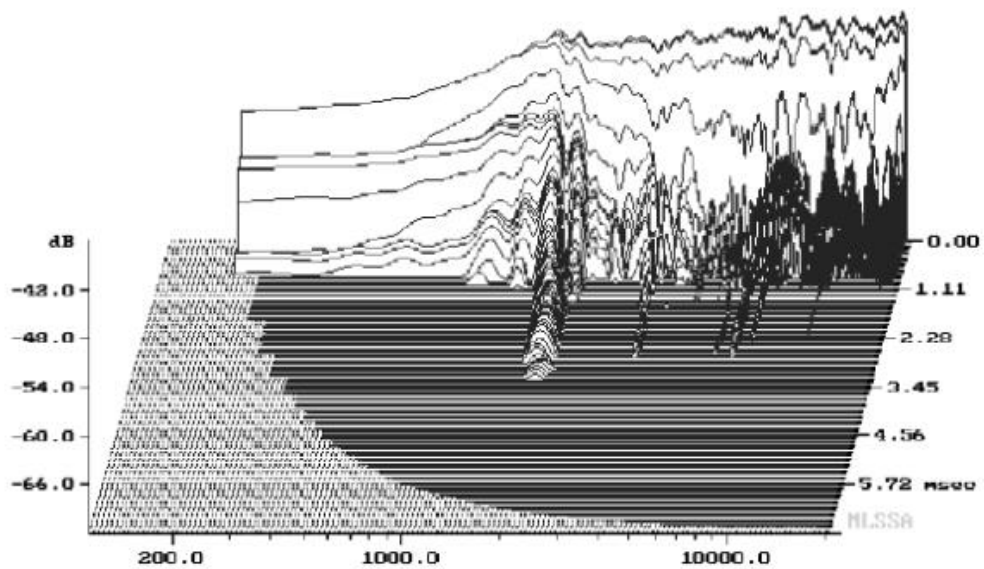

Dimensions in mm

