


TWEETER

TW025M2 D04TTP0010
101951Q

Apr.98


TW025 . Textile cavity. 4Ω

- Critically damped polyester based fabric dome coupled with polyethylene laminate
- Vented pole piece with double damping (front + vent)
- High impact polymer face plate - small horn load controlling the smooth frequency response
- Ultra-light copper clad aluminium wire voice coil with braided wire
- Natural felt damped and tuned back chamber

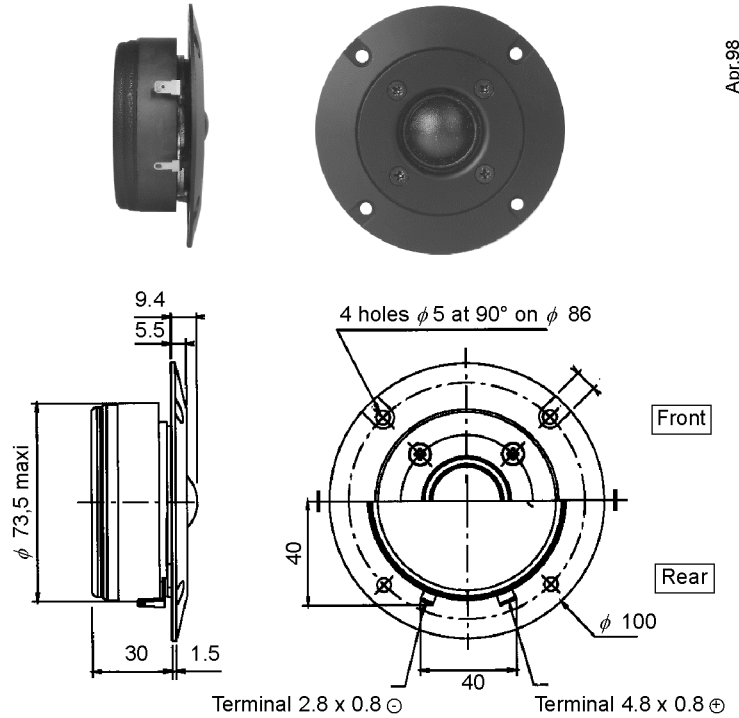


All dimensions in mm

Response Curve

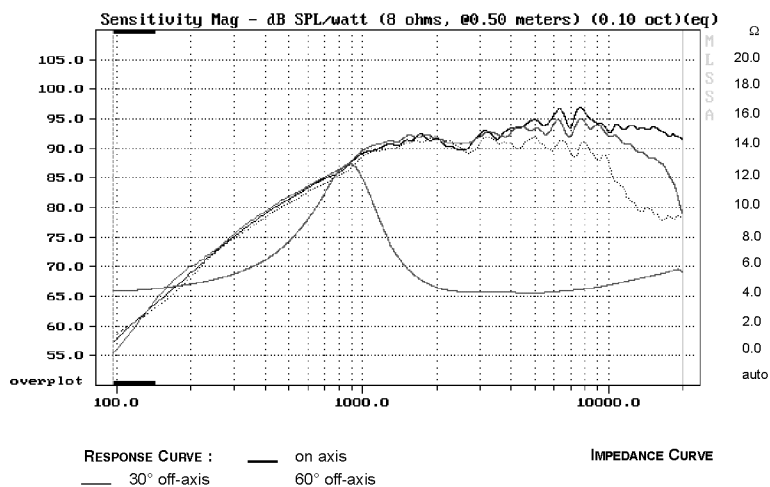

Waterfall

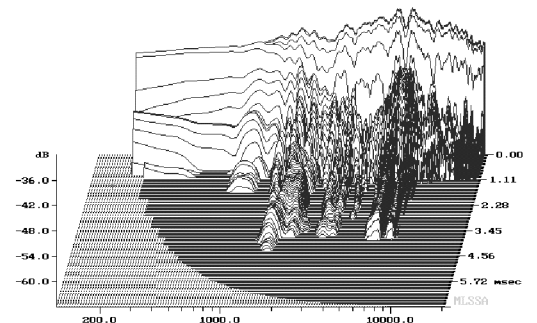

Cumulative Spectral Decay Log Frequency - Hz

SPECIFICATIONS

Technical characteristics	Symbol	Value	Units
PRIMARY APPLICATION			
Nominal Impedance	Z	4	Ω
Resonance Frequency	Fs	1000	Hz
Nominal Power Handling	P	100	W
Sensitivity (2,83 v/1m)	E	94	dB
VOICE COIL			
Voice Coil Diameter	φ	25	mm
Minimum Impedance	Zmin	4,4	Ω
DC Resistance	Re	3,8	Ω
Voice Coil Inductance	Lbm	-	μH
Voice Coil Length	h	1,7	mm
Former	-	Aluminium	-
Number of Layers	n	2	-

MAGNET

Magnet Dimensions	φ x h	72 x 15	mm
Magnet Weight	m	0,24	kg
Flux Density	B	1,5	T
Force Factor	BL	3,1	NA ⁻¹
Height of Magnetic Gap	He	1,0	mm
Stray Flux	Fmag	-	Am ¹
Linear Excursion	Xmax	± 0,3	mm

PARAMETERS

Suspension Compliance	Cms	-	mN ⁻¹
Mechanical Q Factor	Qms	-	-
Electrical Q Factor	Qes	-	-
Total Q Factor	Qts	-	-
Mechanical Resistance	Rms	-	kg s ⁻¹
Moving Mass	Mms	-	kg
Effective Piston Area	S	6,2.10 ⁻⁴	m ²
Mass of Speaker	M	0,53	kg

Suggested Applications

Crossover Frequency	Slope	Inductance	Capacitor	Power Handling
Hz	dB / Oct.	mH	μF	W
2000	12	0,36	12	100
3000	6	-	10	80