

DELTA 1004ASW PWM Amplifier + SMPS

DELTA 1004ASW is a class-d power amplifier with on-board switch-mode power supply.

DELTA 1004ASW is new amplifier in our DELTA range of amplifiers, a new topology combining the best of analog amplifier design with class-d/switching amplifiers.

DELTA 1004ASW offers a versatile and compact solution for many applications in the audio field.

DELTA 1004ASW is rated at 1000W into 4 ohms and has several means of protecting the amplifier and the load, overcurrent protection, thermal overload protection, soft-start etc. etc.

The DELTA range of amplifiers offer very high audio quality with very good specs, stability and square wave reproduction, EMI and noise is very good as well.


Amplifier specification	
Rated power 4 ohms	1000 W
Power supply	110 to 240V AC
Aux. Supplies outputs	+18V
Freq. Range (+0, -1dB)	15 – 30.000 Hz
THD + N	0.02% typ.
Dynamic Range	110 dB typ.
Max. output current	30A
Min. load impedance	4 ohms
Damping Factor	400 typ.
Input voltage	1V - 10 k balanced/unbalanced
Operation	Full bridge amplifier with smps
Overload protection, thermal protection	Yes , yes
Dimensions	180 x 100 x 40mm
Heatsink	External

DELTA 1004ASW PWM Amplifier + SMPS**Header specifications.**

Power Input	
1	AC Live
2	AC Neutral


Speaker Outputs	
1	+ Out CH1
2	-Out CH1

Inputs	
1	+IN CH1
2	GND
Indication	
4	Overload
5	Clip
6	+12V
7	GND

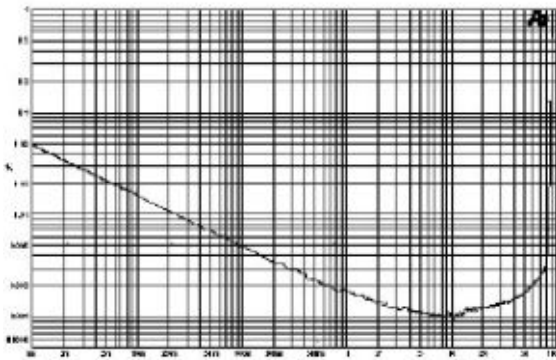
Performance Graphs

THD vs. Power Output , SE 8 ohms


DELTA 1004ASW PWM Amplifier + SMPS

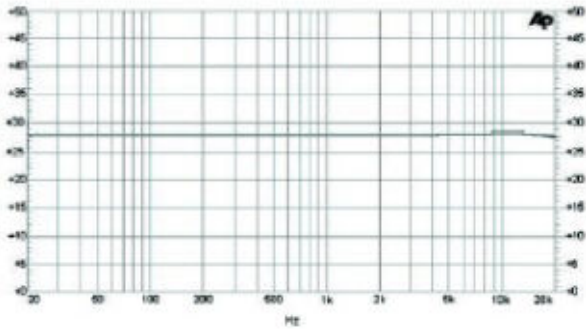

Freq Response 4 ohms mono

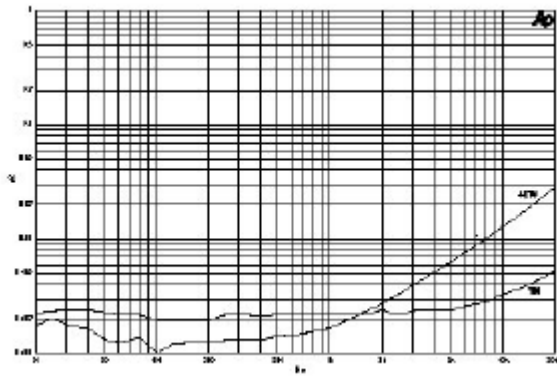

THD + N vs. Frequency – 4 ohms

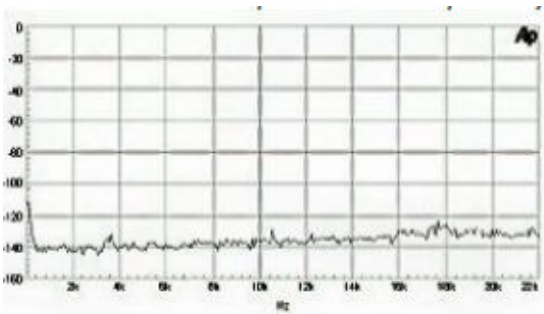

Noise floor,