

Box Properties

--Description--

Name: 1x18 comparison

Type: Vented Box

Shape: Prism, square

--Box Parameters--

Vb = 95,1 liters

V(total) = 156,6 liters

Fb = 41,26 Hz

F3 = 50,87 Hz

Fill = minimal

--Vents--

No. of Vents = 1


Vent shape = rectangle

Vent ends = one flush

Hv = 140, mm

Wv = 430, mm

Lv = 952,8 mm

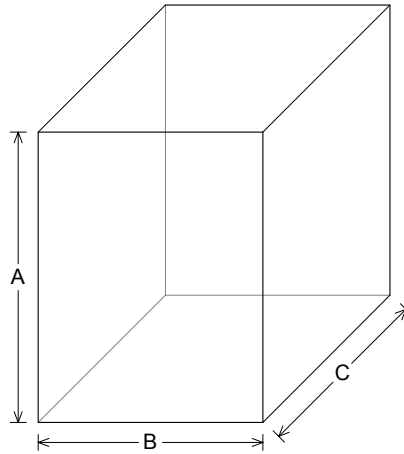

--External Dimensions--

A = 706, mm

B = 546, mm

C = 583, mm

--Internal Dimensions--

A = 670, mm

B = 510, mm

C = 510, mm

--Wall Thickness--

Front = 55, mm

Side = 18, mm

Driver Properties

--Description--

Name: DL18MT (2001)

Type: Standard one-way driver

Company: Electro-Voice, Inc.

Comment: DL series

Frame: Cast aluminum frame.

Voice Coil: 63.5 mm (2.5 in) aluminum coil. Polyimide former.

Terminals: Push

Magnet: 2.2 kg (4.9 lb) barium ferrite magnet.

--Configuration--

No. of Drivers = 1

--Driver Parameters--

Fs = 34, Hz

Qms = 9,

Vas = 291, liters

Xmax = 5,588 mm

Sd = 1300 sq.cm




Qes = 0,38

Re = 6, ohms

Le = 1,1 mH

Z = 8, ohms

Pe = 400, watts

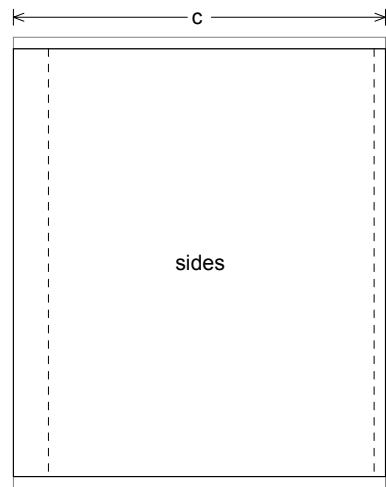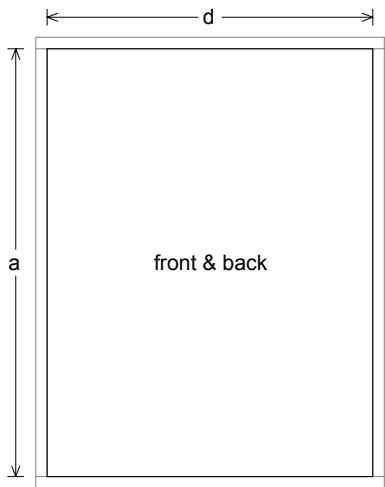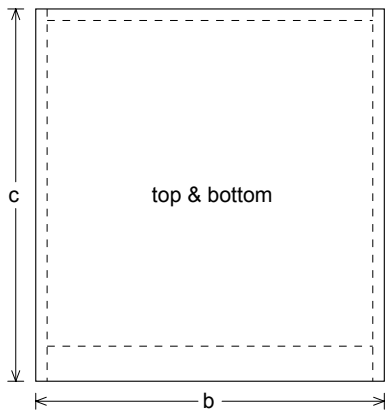

Box Parts

Box Shape: Square Prism

1 Top, 1 Bottom: depth (c) = 583, mm
width (b) = 546,, thickness = 18, mm

1 Front: height (a) = 670, mm
width (d) = 510,, thickness = 55, mm

1 Back: height (a) = 670, mm
width (d) = 510,, thickness = 18, mm

2 Sides: height (a) = 670, mm
depth (c) = 583,, thickness = 18, mm

--Driver Mounting--
Mounting: Flush

--Vent Parts--

1 Top, 1 Bottom:
width (e) = 430,, length (h) = 952,8 mm
thickness = 3,175 mm

2 Sides:
height (g) = 146,4, length (h) = 952,8 mm
thickness = 3,175 mm

